SET-UP SHEET

XRAY XT8

RACE	BASIC SET-UP SHEET
TRACK	

NAME		
CITY / COUNTRY		
CONTACT		

DATE	

TEMPERATURE / °F or °C	AIR	TRACK

LAPS	FINAL POSITION	BEST LAPTIME/sec	RACE LENGTH/min.

TRACK SIZE	☐ OPEN	☐ MEDIUM	☐ TIGHT
TRACK TRACTION	☐ HIGH	☐ MEDIUM	☐ LOW
TRACK SURFACE	☐ SMOOTH	☐ MEDIUM	☐ BUMPY

DIFFERENTIALS

TYPE		
FRONT	CENTER	REAR
Standard	Standard	Standard
DIFFERRENTIAL - OIL		
7.000	10.000	7.000

GEARING

CLUTCH BELL	13 T	SPUR GEAR	48 T
CROWN GEAR	43 T	PINION	10 T
SPRING	Med.	SHOE	1.71 Alu

SHOCKS

FRONT		REAR
600	OIL	600
Dark Blue	SPRING	Dark Blue
1.4 mm	PISTON HOLE SIZE	1.5 mm
	PISTON TYPE	
☒ ☐ ☐	PISTON HOLES	☒ ☐ ☐
● HOLE	HOLES IN PISTON	● HOLE

ANTI ROLL BAR

FRONT	THICKNESS / mm	REAR
2.4		2.8

TIRES

XRAY Thrax	TYPE	XRAY Thrax
XRAY	INSERTS	XRAY
XRAY XT8	WHEELS	XRAY XT8

ENGINE

TYPE	
MANIFOLD	
MUFLER	
PLUG	
FUEL	

BODY

TYPE	XRAY XT8

FRONT ● ☒ ■ ☑ APPLIED REAR

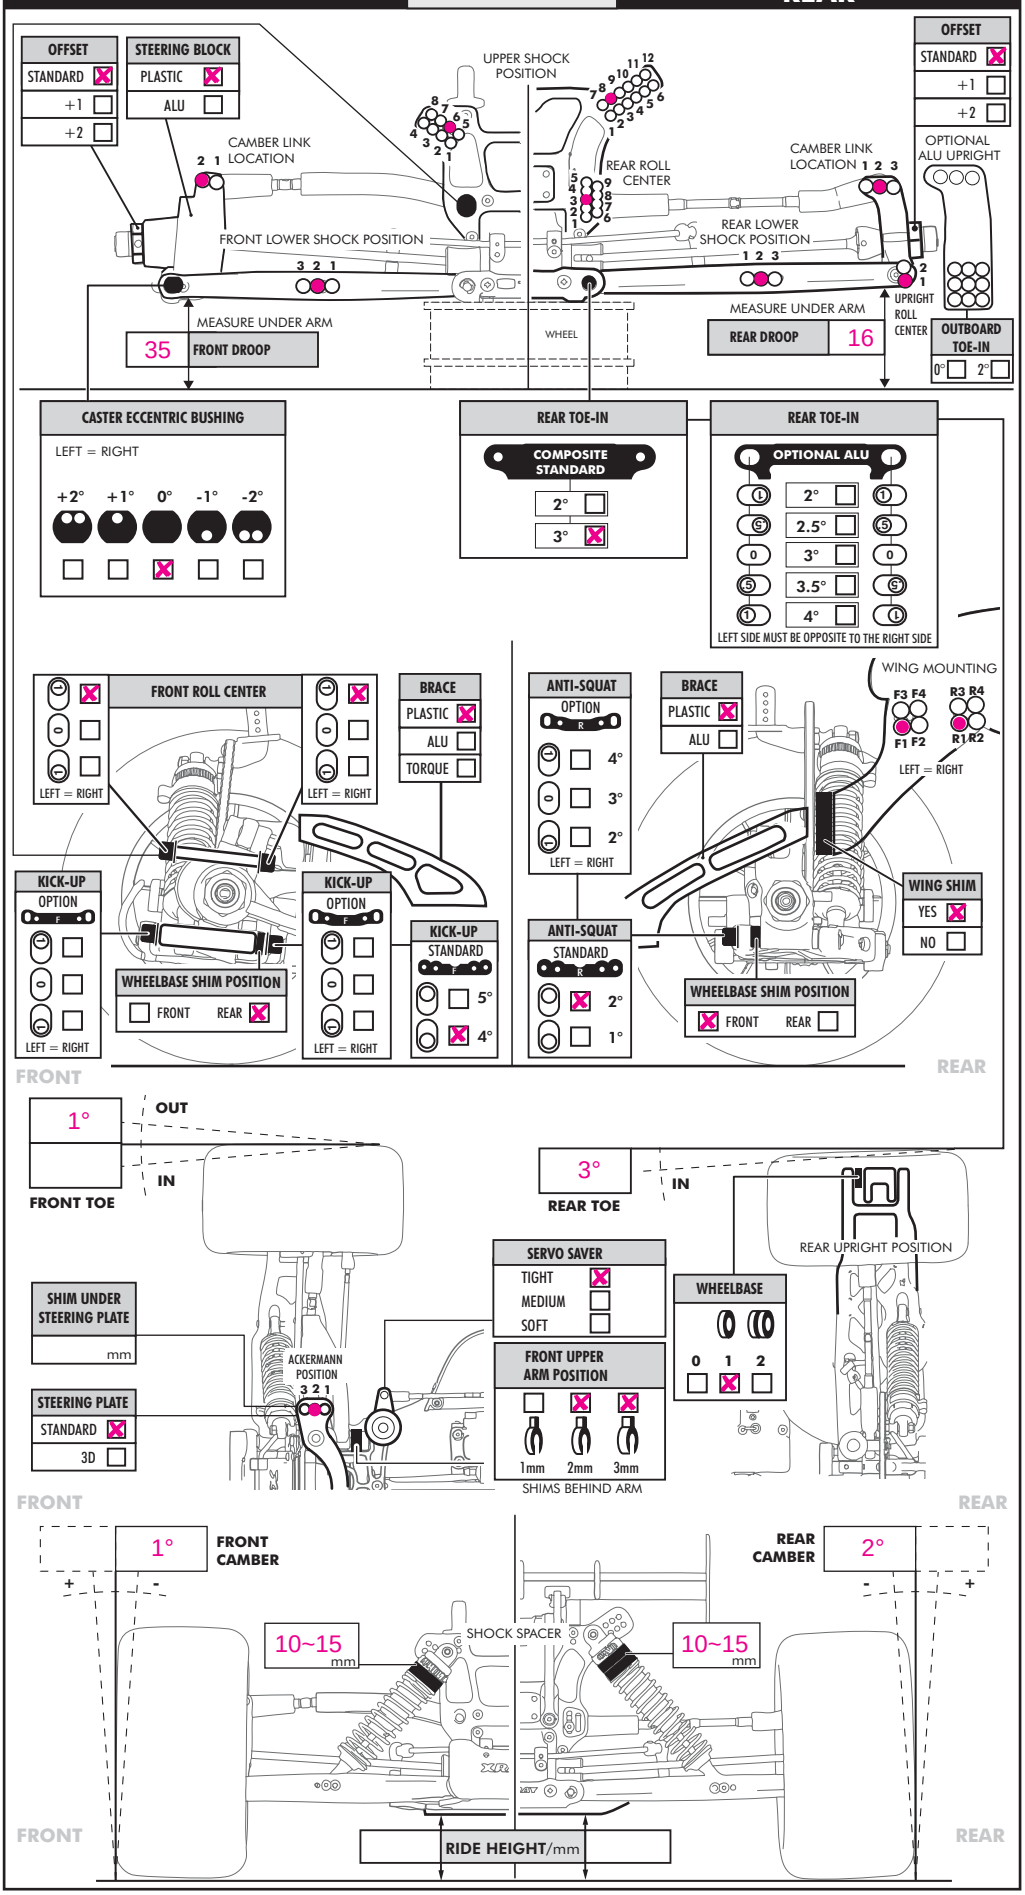

COMMENTS